



APPLICATIONS

The 2nd Generation of genset controls is designed to provide a maximum of flexibility in a user friendly and intuitive design with a large graphical display for various applications. This controller is one of a series of new and powerful genset controls (**easYgen**). This trend-setting technology offers a maximum of flexibility for each user. New technologies included are:

FlexApp™ - This intelligent and flexible feature provides the tools to easily configure for multiple applications. The user can configure the easYgen-1000 Series for use as

- Measuring transducer/engine control [0-CB-Mode {0}] for start/stop and measuring conversion
- 1-breaker-control [GCB open, {10}] above plus engine/generator protection
- 1-breaker-control [GCB open/close, {10c}] above plus stand-by power applications
- 2-breaker-control [GCB/MCB open/close, {20c}] above plus AMF, and open transition applications

DynamicsLCD™ - The graphical LCD provides softkeys that vary depending on application and operation.

FlexIn™ - The two analog inputs can be freely configured (adaptable for each type of sensor) by the user as:

- VDO (0 to 180Ohm [0 to 5bar/0 to 10bar]; 0 to 380Ohm [40 to 120°C/50 to 150°C]; 0 to 180 Ohm [0 to 100% level]; isolated (2-pole) and non-isolated (1-pole) ground senders only)
- Resistive input (Pt100 / linear 2point / user-defined 9point)
- 0/4 to 20 mA (linear 2point / user-defined 9point)

FlexCAN™ - Flexible isolated CAN bus for multiple use. Selectable during configuration: CANopen, or CAN (CAL); coupling of easYlite remote annunciator; coupling of 3rd party expansion cards supported (request detailed information from our sales department). J1939 protocol for ECU coupling and alarm management, remote start/stop with ECU possible (Scania, Volvo, Deutz, mtu).

LogicsManager™ - A large number of measuring values, inputs, internal states or constant values can be combined logically to operate a relay contact or an internal function.

Genset Control for Single Unit Operation

DESCRIPTION

I/Os

- **FlexRange™** - true RMS 3phase generator and mains voltage, measuring inputs:
 - o Rated 120 Vac (max. 150 Vac) **and**
 - o Rated 480 Vac (max. 600 Vac) **in 1 unit**
- True rms 3phase generator current/power
- True rms 1phase current input alternatively and freely configurable for
 - o Mains current
 - o Ground current (ground fault protection)
- 1 speed input (magnetic/switching)
- up to 8 configurable discrete alarm inputs
- **LogicsManager™** - up to 9 program. relays
- **FlexIn™** - 2 configurable analog inputs
- **FlexCAN™** - CAN bus communication (32 participants, isolated)

Protection

(ANSI #)

Generator / Engine: Battery voltage, overspeed (12), over-/undervoltage (59/27), over-/underfrequency (81O/U), overload (32), reverse/reduced power (32R/F), unbalanced load (46), definite time-overcur. (50/51), inverse time-overcurrent (IEC255), calculated + measured ground fault

Features

- **FlexApp™** Technology (4 application modes)
- **DynamicsLCD™** - 128x64 pixel graphical interactive LC display with softkeys
- Start/stop logic for Diesel/Gas engines
- Engine pre-glow or purge control
- kWh meter, kvarh meter
- Operating hours/start/maintenance counters
- Configurable trip levels/delays/alarm classes
- Push-buttons (softkeys) for direct control
- PC and/or front panel configurable
- Multi-level password protection
- Multi-lingual capability (10 languages in 1 unit configurable: English, German, French, Italian, Spanish, Portuguese, Russian, Turkish, Chinese, Japanese)
- Event recorder (300 events, FIFO) with real time clock (battery backed; min. 6 years)
- Modem connectivity with DPC
- easYlite annunciator support via CAN bus
- Remote control via interface / digital signals

Differentiation


- Current input as ..5 A (standard) or ..1 A

- **FlexApp™** Technology
- Flexible and multifunctional **DynamicsLCD™**
- AMF/loss of mains auto start/stop
- Complete engine, generator, and mains protection in one unit
- True rms voltage sensing with **FlexRange™**
- True rms current/power sensing
- kWh meter
- Counters for engine starts, operating hours, maintenance call
- Freely configurable discrete inputs
- Freely configurable analog **FlexIn™** inputs
- Freely programmable relay outputs with **LogicsManager™**
- PC and/or front panel configurable
- Multi-lingual capability 10 languages in 1 unit
- **FlexCAN™** communication (32 participants, isolated)
- Modbus RTU Slave
- 6.5 to 40.0 Vdc power supply
- Flush-mounting
- CE marked
- UL/cUL Listed
- GL, LR Marine Approval

SPECIFICATIONS


Power supply	12/24 Vdc (6.5 to 40.0 Vdc)	Discrete inputs	isolated
Intrinsic consumption	max. 15 W	Input range	12/24 Vdc (6.5 to 40.0 Vdc)
Ambient temperature (operation)	-20 to 70 °C / -4 to 158 °F	Input resistance	approx. 6.7 kW
Ambient temperature (storage)	-30 to 80 °C / -22 to 176 °F	Relay outputs	isolated
Ambient humidity	95 %, non-condensing	Contact material	AgCdO
Voltage	(both ranges within one unit on different terminals, $\wedge$ /D)	Load (GP)	2.00 Aac@250 Vac
100 Vac [1]	Rated (V_{rated})		2.00 Adc@24 Vdc / 0.36 Adc@125 Vdc / 0.18 Adc@250 Vdc
	Max. value (V_{max})	Pilot duty (PD)	
	Rated ($V_{phase-ground}$)		1.00 Adc@24 Vdc / 0.22 Adc@125 Vdc / 0.10 Adc@250 Vdc
	Rated surge volt. (V_{surge})	Analog input	freely scaleable
and 400 Vac [4]	Rated (V_{rated})	Type	variable
	Max. value (V_{max})	Resolution	10 Bit
	Rated ($V_{phase-ground}$)	Housing	Flush
	Rated surge volt. (V_{surge})	Dimensions	Flush
Accuracy	Class 1	Front cutout	Flush
Measurable alternator windings	3p-3w, 3p-4w, 1p-2w, 1p-3w	Connection	screw/plug terminals 2.5 mm ²
Setting range	primary	Front	insulating surface
Linear measuring range	1.25× V_{rated}	Protection system	with professional installation
Measuring frequency	50/60 Hz (40 to 70 Hz)		Front
Input resistance per path	[1] 0.498 MW, [5] 2.0 MW		Front
Max. power consumption per path	< 0.15 W		Back
Current	Rated (I_{rated})	Weight	approx. 800 g
	[1] ..1 A or [5] ..15 A	Disturbance test (CE)	tested according to applicable EN guidelines
Linear measuring range	$I_{gen} = 3.0 \times I_{rated}$, $I_{mains} = 1.5 \times I_{rated}$	Listings	UL/cUL listed
Burden	< 0.15 VA	Marine Approvals	GL, LR , others upon request
Rated short-time current (1 s)	[1] 50× I_{rated} , [5] 10× I_{rated}		

DIMENSIONS

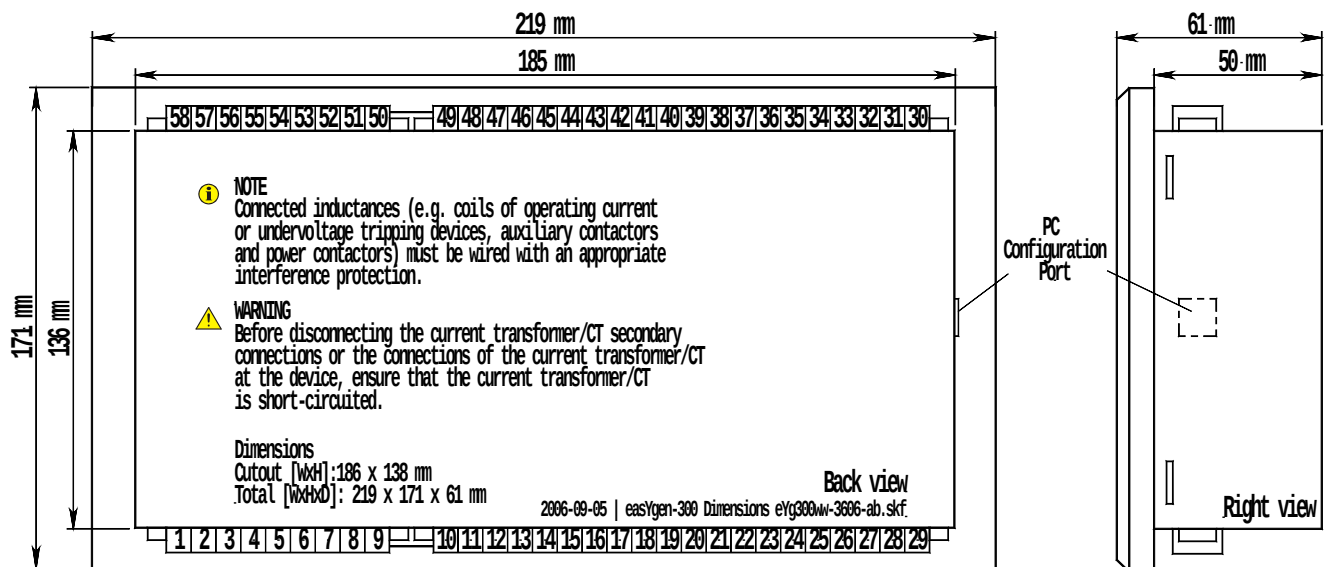

PART NUMBERS AND ORDER CODES

Model	Rated PT secondary	Rated CT secondary	Part Number	Description
Mounting	<i>FlexRange™</i>		(P/N)	
	69/120 Vac	..15 A	8440-1809	EASYGEN-1500-55B
1500	and			
	277/480 Vac	..1 A	8440-1810	EASYGEN-1500-51B



International
Woodward
PO Box 1519
Fort Collins CO, USA
80522-1519
1000 East Drake Road
Fort Collins CO 80525
Ph: +1 (970) 498-3634
Fax: +1 (970) 498-3058
email:
SalesPGD_NAandCA@woodward.com

Europe
Woodward GmbH
Handwerkstrasse 29
70565 Stuttgart, Germany
Ph: +49 (0) 711 789 54-510
Fax: +49 (0) 711 789 54-101
email:
SalesPGD_EMEA@woodward.com

Distributors & Service
Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

www.woodward.com

For more information contact:

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to stgt-doc@woodward.com

© Woodward

All Rights Reserved

37180H - 2012/6/Stuttgart

FEATURES OVERVIEW

		easYgen-1500			
		{0}	{10}	{10c}	{20c}
Configured as ...		No CB control	1 CB control (GCB open)	1 CB control (GCB open / close)	2 CB control (GCB / MCB open / close)
Measuring					
Generator voltage (3phase/4-wire)	rated 69/120 Vac	ü	ü	ü	ü
- true rms	max. 86/150 Vac	ü	ü	ü	ü
- FlexRange™	rated 277/480 Vac	ü	ü	ü	ü
	max. 346/600 Vac	ü	ü	ü	ü
Generator current #1 (3phase/4-wire, true RMS)	..1 A or ..5 A	ü	ü	ü	ü
Mains voltage (3phase/4-wire)	rated 69/120 Vac	(ü)#2	(ü)#2	(ü)#2	ü
- true rms	max. 86/150 Vac	(ü)#2	(ü)#2	(ü)#2	ü
- FlexRange™	rated 277/480 Vac	(ü)#2	(ü)#2	(ü)#2	ü
	max. 346/600 Vac	(ü)#2	(ü)#2	(ü)#2	ü
Mains current #1 (1phase/2-wire, true RMS)	..1 A or ..5 A	(ü)#2	(ü)#2	(ü)#2	ü
Control					
Breaker control logic	FlexApp™	0	0	1	2
Number of controlled power circuit breakers	GCB open#3		ü	ü	ü
can be user configured depending on application needs out of 4 Modes	GCB open/close#3			ü	ü
	GCB/ MCB open/close#3				ü
Isolated single-unit operation				ü	ü
AMF (auto mains failure operation)					ü
Stand-by operation					ü
Open transition (break-before-make)					ü
ATS (automatic transfer switching)					ü
Accessories					
Softkeys (advanced LC display)	DynamicsLCD™	ü	ü	ü	ü
Start/stop logic for Diesel/Gas engines		ü	ü	ü	ü
kWh meter, kvarh meter		ü	ü	ü	ü
Operating hours/start/maintenance counter		ü	ü	ü	ü
Configuration via PC #4		ü	ü	ü	ü
Event recorder with real time clock (battery backup)		300	300	300	300
Flush-mounting		ü	ü	ü	ü
Protection ANSI#					
Generator: voltage/frequency	59/27/810/81U	(ü)#6	ü	ü	ü
Generator: overload, reverse/reduced power	32/32R/32F	(ü)#6	ü	ü	ü
Generator: unbalanced load	46	(ü)#6	ü	ü	ü
Generator: definite time-overcurrent	50/51	(ü)#6	ü	ü	ü
Generator: inverse time-overcurrent	IEC255	(ü)#6	ü	ü	ü
Generator: ground fault #5		(ü)#6	ü	ü	ü
I/Os					
Speed input (magnetic/switching; Pickup)		ü	ü	ü	ü
Discrete alarm inputs (configurable)		8	8	7	5
Relay outputs (configurable)	LogicsManager™	8	7	6	4
Analog inputs #7 (configurable)	FlexIn™	2	2	2	2
CAN bus communication #8	FlexCAN™	ü	ü	ü	ü
RS-232 Modbus RTU Slave #9		ü	ü	ü	ü
Listings/Approvals #10					
UL/cUL Listed		ü	ü	ü	ü
LR, GL Marine Approval		ü	ü	ü	ü
CE Marked		ü	ü	ü	ü

- #1 Selection during order; both ..1/5 A (standard) or both ..1 A (alternatively);
#2 the mains are measured and may be displayed, but they will not be evaluated
#3 dedicated to a fixed relay
#4 Cable incl. software necessary (DPC = Part Number P/N 5417-557)
#5 calculated + measured ground current
#6 possible (not dedicated to a fixed relay)

- #7 selectable during configuration
VDO (0 to 180 Ohm, 0 to 5 bar, 2-pole)
VDO (0 to 180 Ohm, 0 to 10 bar, 2-pole)
VDO (0 to 380 Ohm, 40 to 120°C, 2-pole)
VDO (0 to 380 Ohm, 50 to 150°C, 2-pole)
Pt100
Resistive input (linear 2pt. or free chart 9pt.)
20 mA (0/4 to 20 mA, freely configurable)
#8 freely selectable during configuration
CANopen, CAN (CAL), or J1939; request info
#9 external electrical isolation required (e.g. DPC cable P/N 5417-557)
#10 contact your sales rep to find out whether your desired unit has the required approval

Example of the **LogicsManager**

